




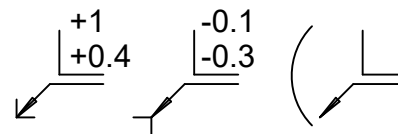
CABLE AND HOSES ARE
SUPPLIED BY DIETRONIC,
INSTALLATION IS AT
CUSTOMER CHARGE

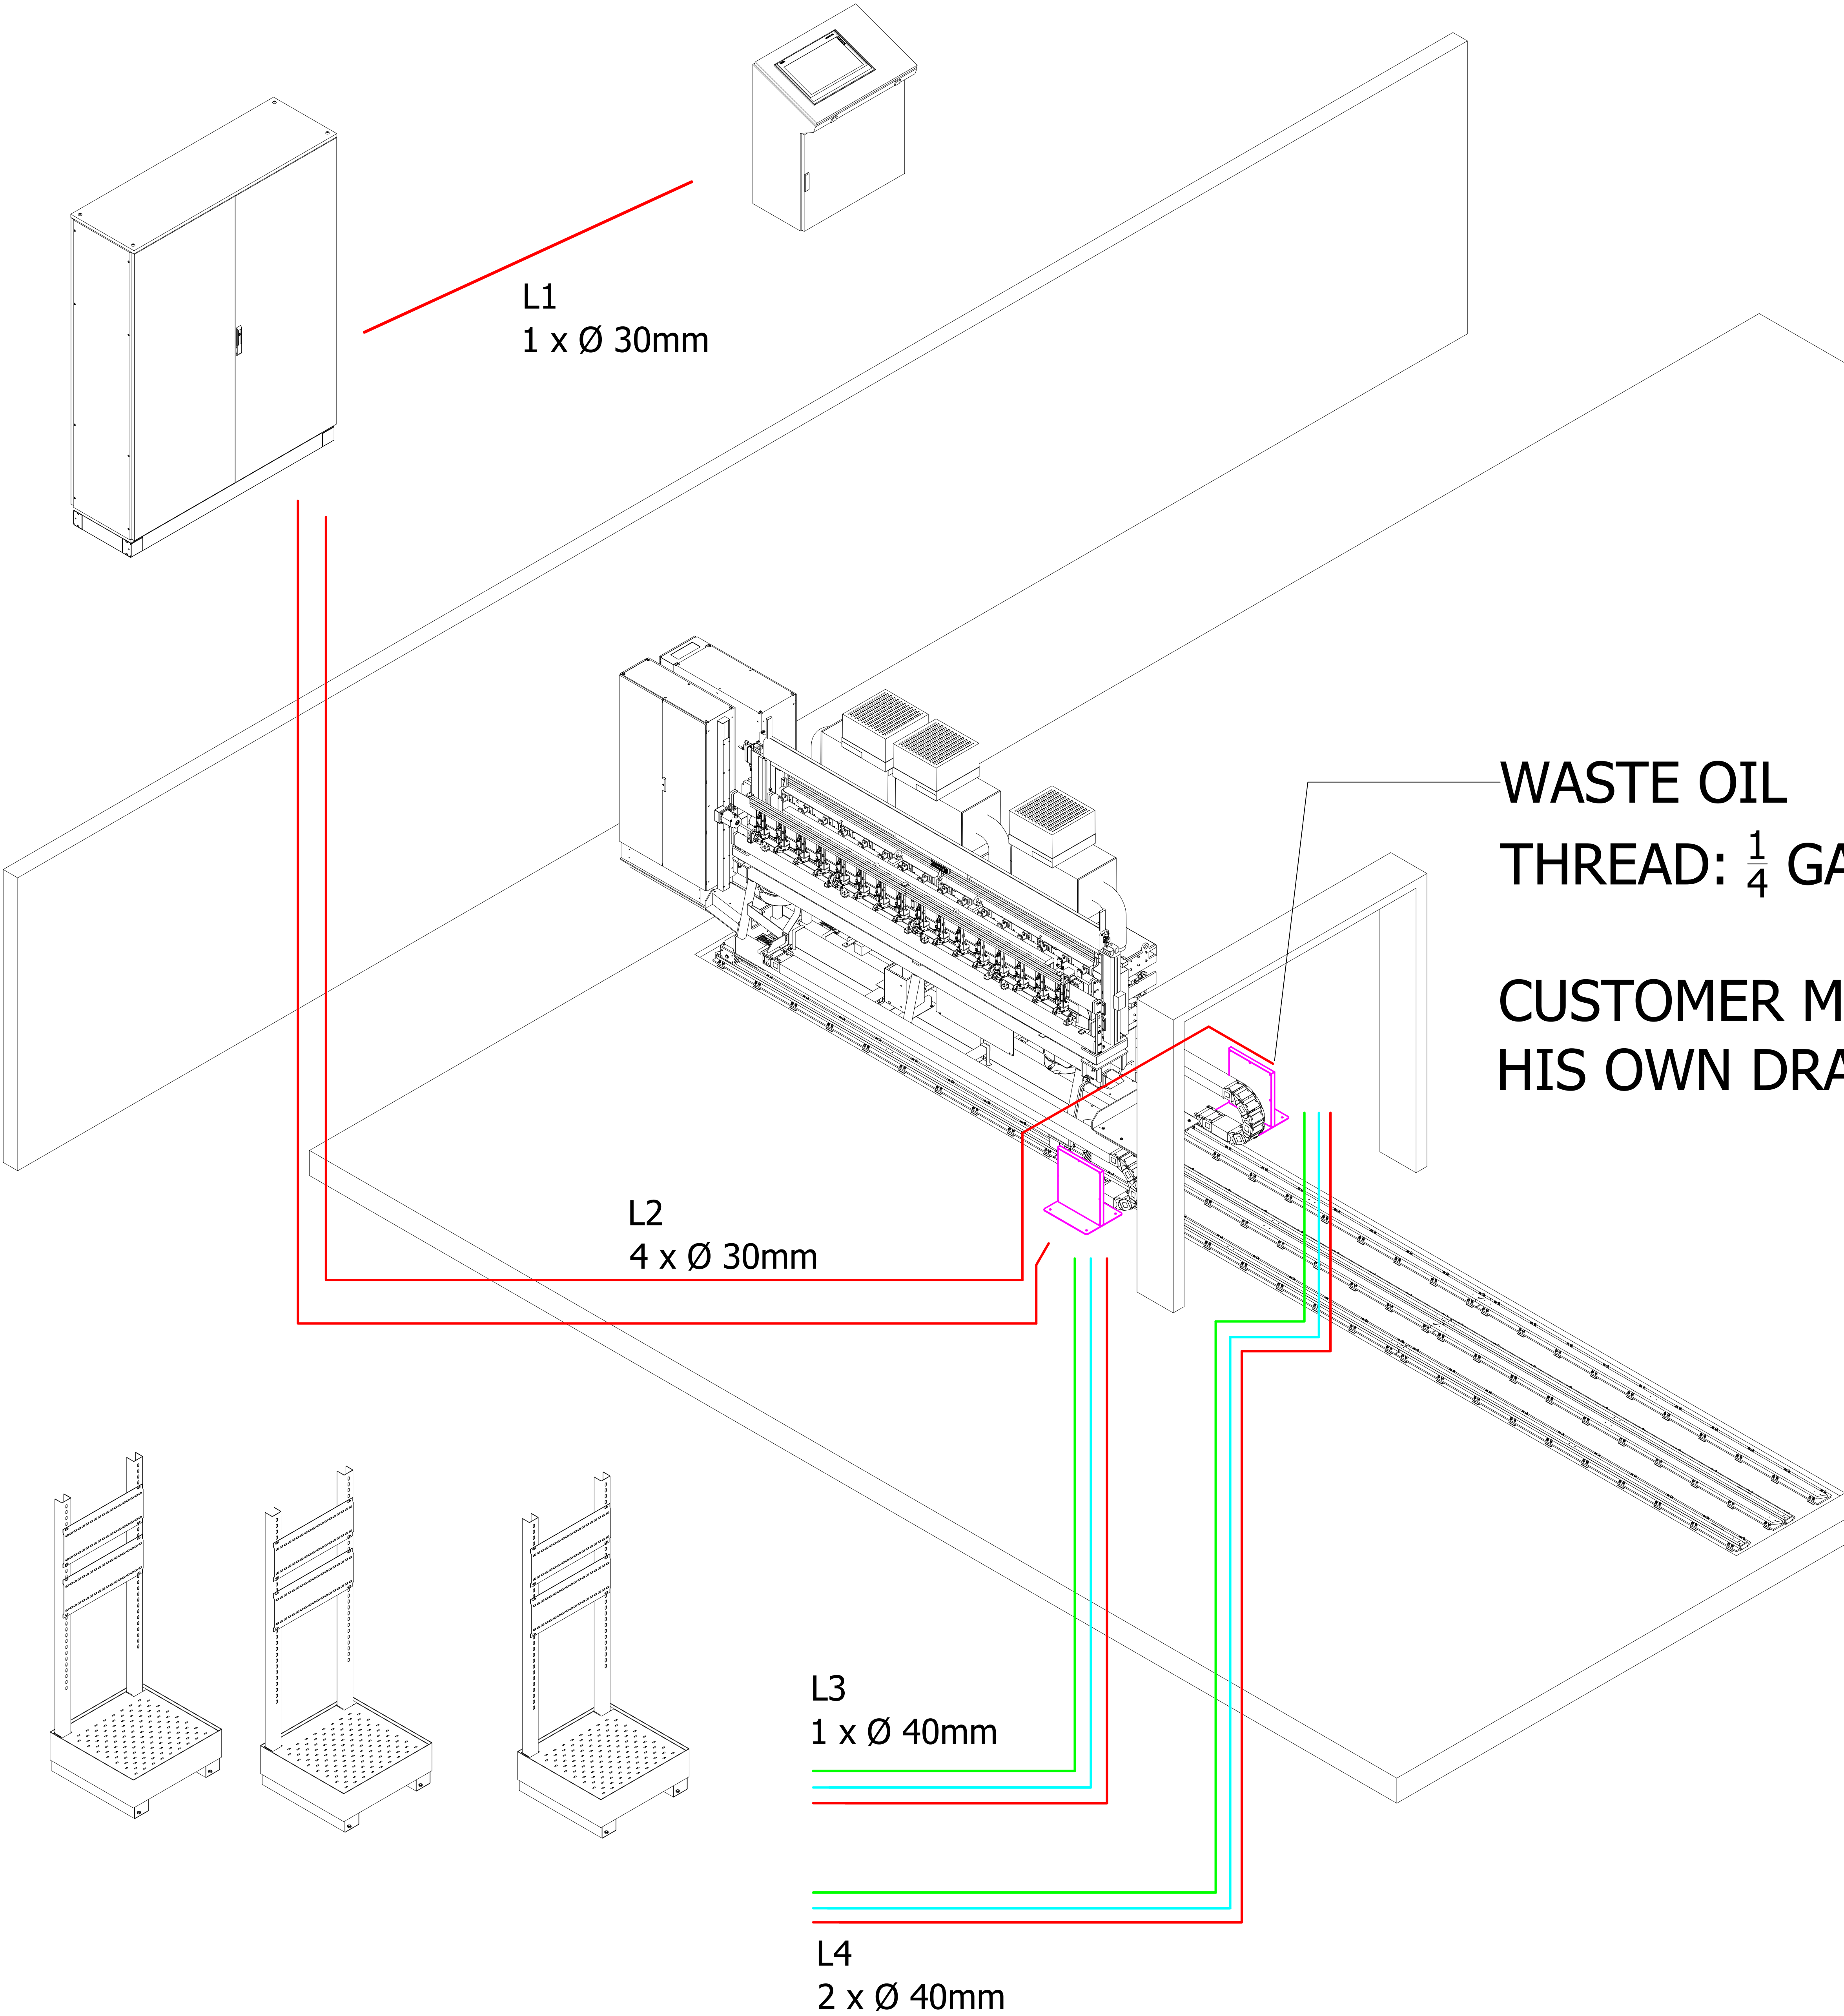

L1: 20m
L2: 20m
L3: 20m
L4: 20m

— ELECTRICAL CONNECTION
— PNEUMATIC CONNECTION
— HYDRAULIC CONNECTION

ISO 2768-2 K												
Range	0-10	>10-30	>30-100	>100-300	>300-1000	>1000-3000	0-100	>100-300	>300-1000	>1000-3000		
Tolerance	0.05	0.1	0.2	0.4	0.6	0.8	0.4	0.6	0.8	1	0.2	
Default tolerance except material stock dimensions												
ISO 2768-1 m Linear							Radii and Chamfers			Angular Dimensions		
Range	>0.5-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000	>2000	>0.5-3	>3-6	>6	0-10	>10-50
Tolerance	±0.4	±0.2	±0.3	±0.5	±0.8	±1.0	±1.2	±0.2	±0.5	±1	±4°	±0.5°

		Zoppetti		05/04/2022		
-	PRIMA EMISSIONE					
REV	Description		Designed	Date	Released	Date
 DieTronic lubricating technology		Raw material:	 FIRST ANGLE PROJ.		 ISO 13715	Weight 9660,069
		Surface treatment:				
		Heat treatment:				
		Material	Scale 1 : 100	Sheet size A3	Sheet 1 / 1	
		Description Combi 4000 - Cable Route		Part number 2022856		