




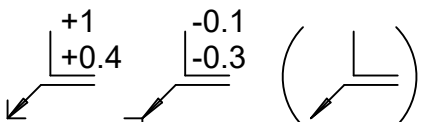
PLATE MUST BE WELD IN THIS POSITION  
ON THE RAIL

OILER  
ONLINE AND OFFLINE PLATE SENSOR

BRUSH  
ONLINE AND OFFLINE PLATE SENSOR

PLATES SUPPLIED BY DIETRONIC,  
INSTALLATION AT CUSTOMER CHARGE

ISO 2768-2 K														
Range	0-10	>10-30	>30-100	>100-300	>300-1000	>1000-3000	0-100	>100-300	>300-1000	>1000-3000				
Tolerance	0.05	0.1	0.2	0.4	0.6	0.8	0.4	0.6	0.8	1	0.2			
Default tolerance except material stock dimensions														
ISO 2768-1 m Linear							Radii and Chamfers			Angular Dimensions				
Range	>0.5-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000	>0.5-3	>3-6	>6	0-10	>10-50	>50-120	>120-400	>400
Toler.	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±0.2	±0.5	±1	±1°	±0.5°	±0.32°	±0.16°	±0.08°

-	PRIMA EMISSIONE		Zoppetti	05/04/2022		
REV	Description		Designed	Date	Released	Date
 		Raw material:	 FIRST ANGLE PROJ.	 ISO 13715	Weight 9660,069	
		Surface treatment:				
		Heat treatment:				
		Material	Scale 1 : 100	Sheet size A3	Sheet 1 / 1	
		Description Combi 4000 - Machine Position Plates		Part number 2022856	Rev.	
This document contains CONFIDENTIAL proprietary information which shall NOT be used, reproduced, or disclosed without prior written approval of Dietronic s.r.l. Notice ISO 16016.						