
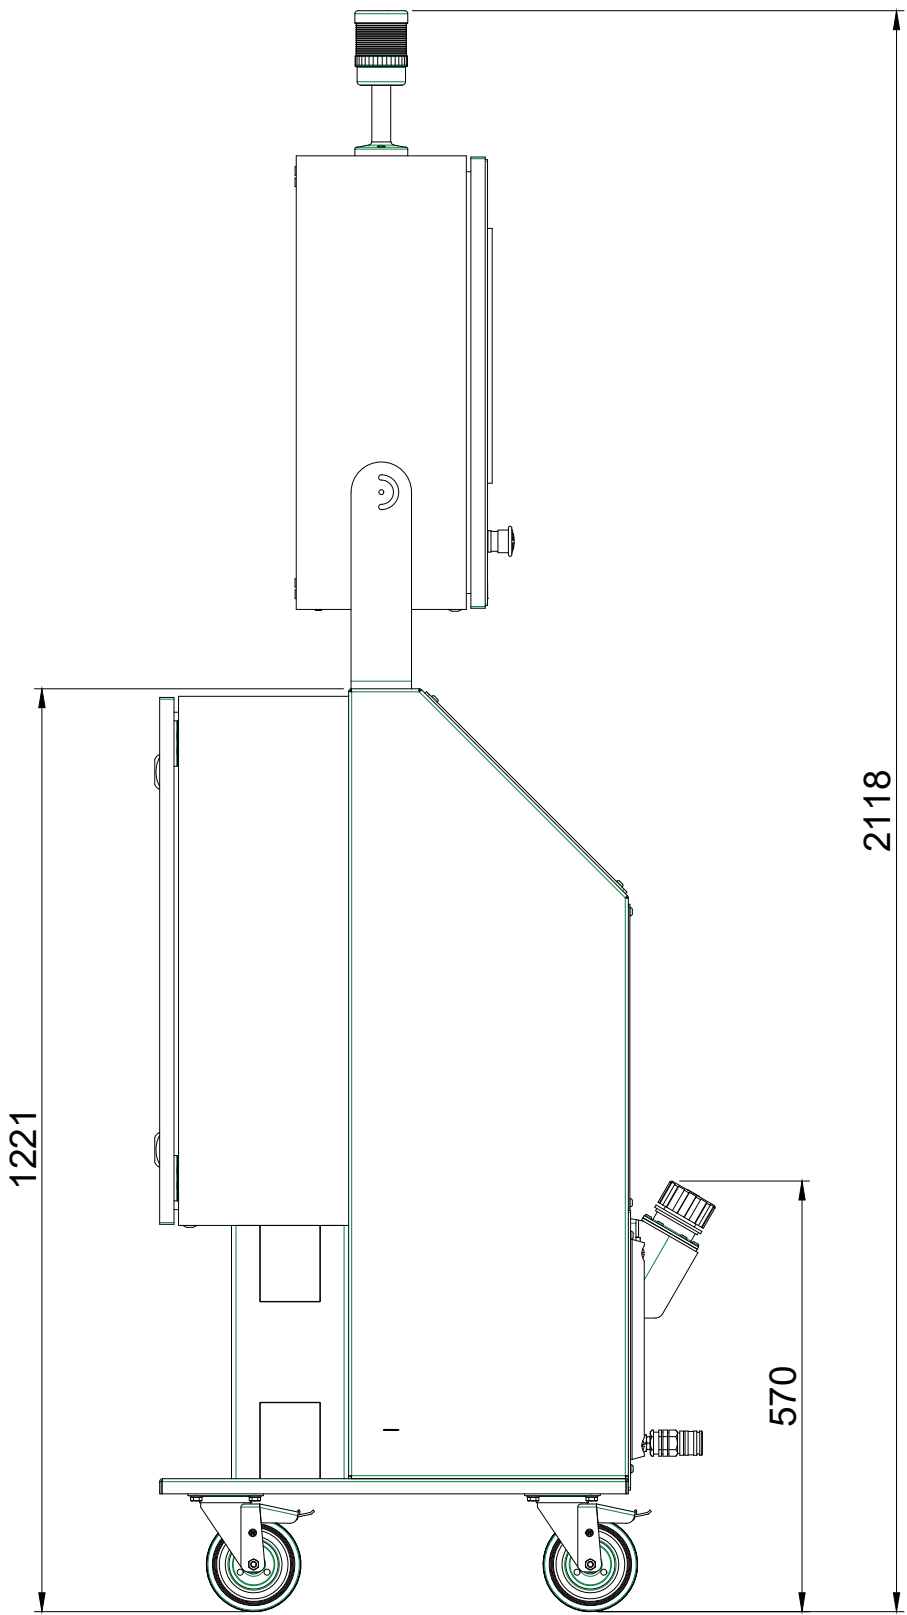






The HMI can be mounted on the Electrical cabinet. Please specify which position you prefer.

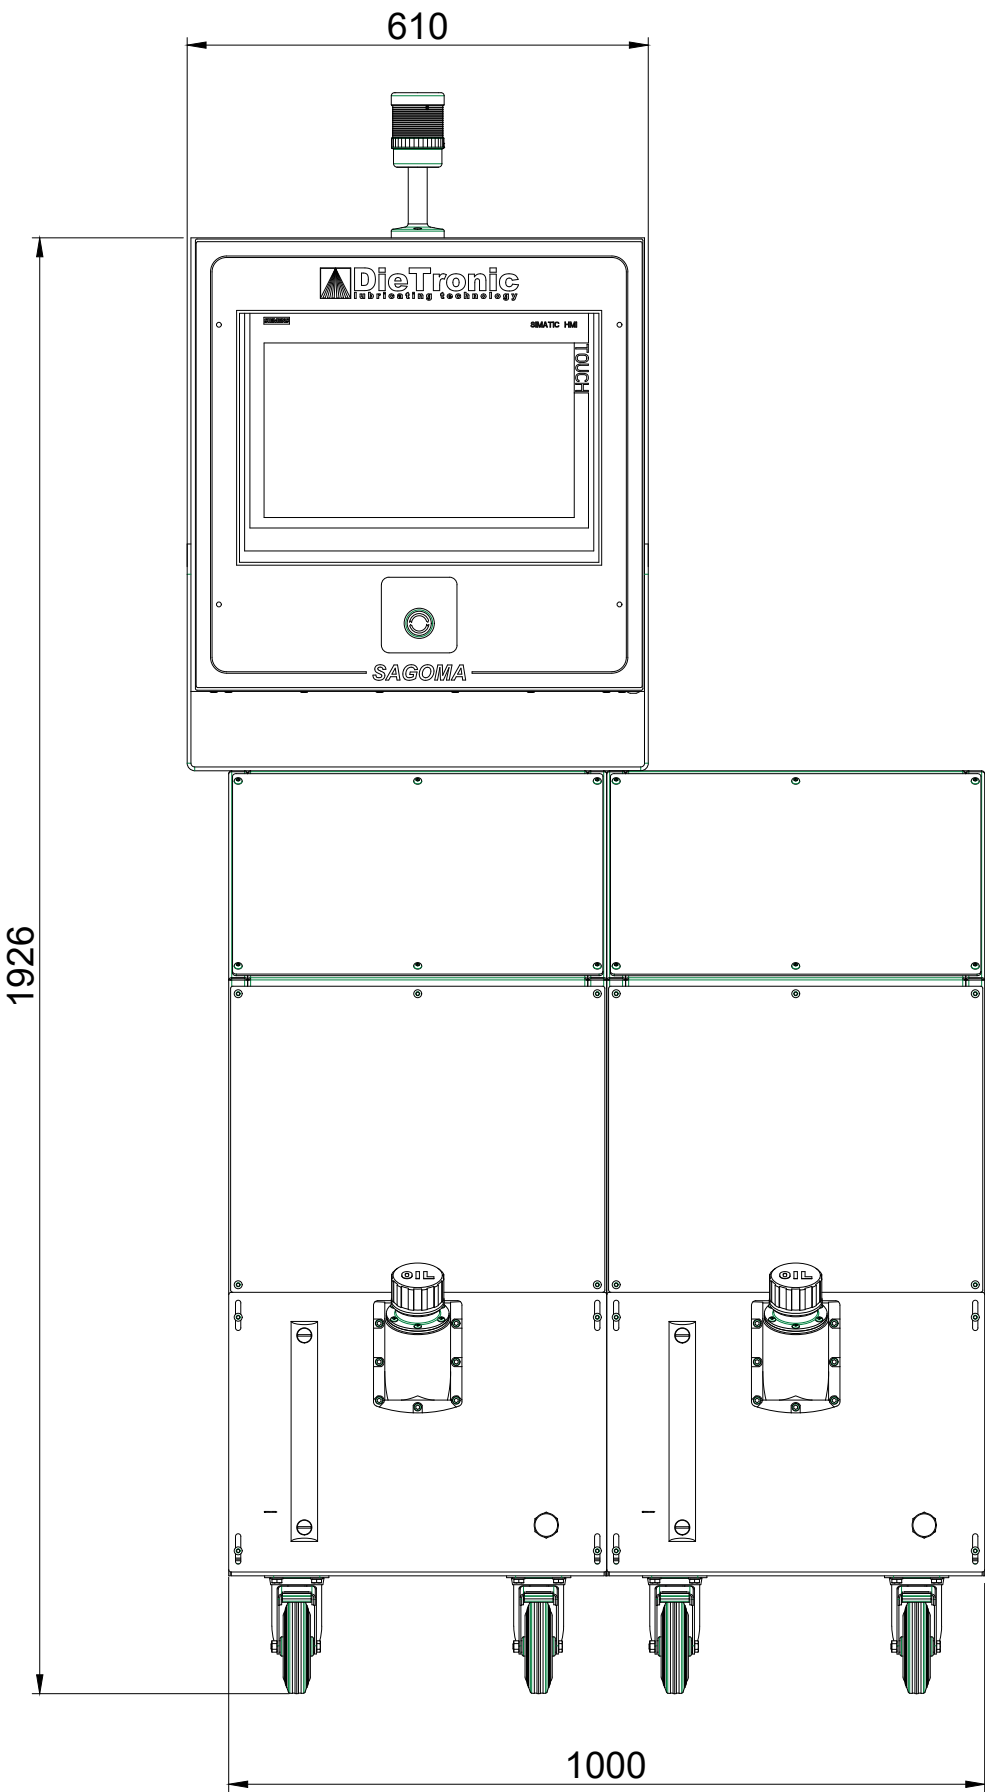

ISO 2768-2 K															
Range	0-10	>10-30	>30-100	>100-300	>300-1000	>1000-3000	0-100	>100-300	>300-1000	>1000-3000					
Tolerance	0.05	0.1	0.2	0.4	0.6	0.8	0.4	0.6	0.8	1	0.2				
Default tolerance except material stock dimensions															
ISO 2768-1 m Linear							Radii and Chamfers			Angular Dimensions					
Range	>0.5-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000	>2000	>0.5-3	>3-6	>6	0-10	>10-50	>50-120	>120-400	>400
Toler.	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2	±0.2	±0.5	±1	±1°	±0.5°	±0.32°	±0.16°	±0.08°

-	PRIMA EMISSIONE		FedericoZoppetti	07/07/2022		
REV	Description		Designed	Date	Released	Date
 		Raw material:				Weight 124.56
		Surface treatment:				
		Heat treatment:				
		Material	Scale 1 : 10	Sheet size A2	Sheet 1 / 1	
		Description Libero	Part number G000195		Rev. -	

This document contains CONFIDENTIAL proprietary information which shall NOT be used, reproduced, or disclosed without prior written approval of DieTronic s.r.l. Notice ISO 16016.

This document contains CONFIDENTIAL proprietary information which shall NOT be used, reproduced, or disclosed without prior written approval of Dietronic s.r.l. Notice ISO 16016.