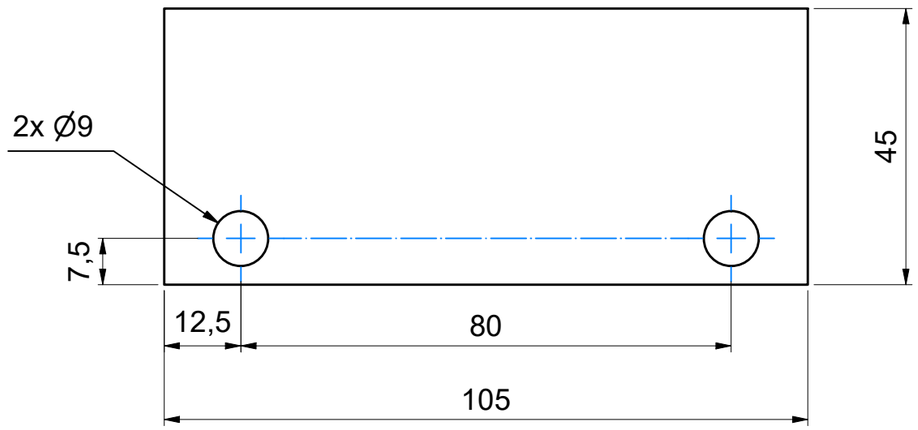

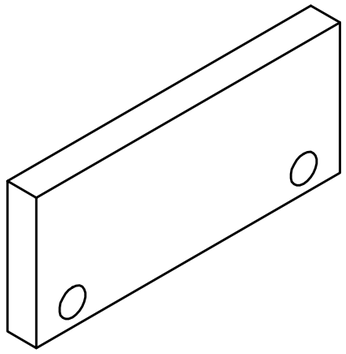

ISO 2768-2 K											
Range	0-10	>10-30	>30-100	>100-300	>300-1000	>1000-3000	0-100	>100-300	>300-1000	>1000-3000	
Tolerance	0.05	0.1	0.2	0.4	0.6	0.8	0.4	0.6	0.8	1	0.2

Default tolerance except material stock dimensions

ISO 2768-1 m Linear								Radii and Chamfers			Angular Dimensions				
Range	>0.5-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000	>2000	>0.5-3	>3-6	>6	0-10	>10-50	>50-120	>120-400	>400
Toler.	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2	±0.2	±0.5	±1	±1°	±0.5°	±0.32°	±0.16°	±0.08°

REV	Description	Designed	Date	Released	Date
-	PRIMA EMISSIONE	FedericoZoppetti	18/05/2022		

DieTronic lubricating technology

Raw material: Piatto trafilato 45x10 h11

Surface treatment: -

Heat treatment: -

FIRST ANGLE PROJ.

ISO 13715

Weight 0,361

Material 1.0037 - Acciaio S235JR

Scale 1 : 1

Sheet size A3

Sheet 1 / 1

Description Head plate OL

Part number 5300853

Rev. -

This document contains CONFIDENTIAL proprietary information which shall NOT be used, reproduced, or disclosed without prior written approval of Dietronic s.r.l. Notice ISO 16016.